




BX152A

connection examples

Parallel connection of two or more BX152A

always use balanced shielded cables

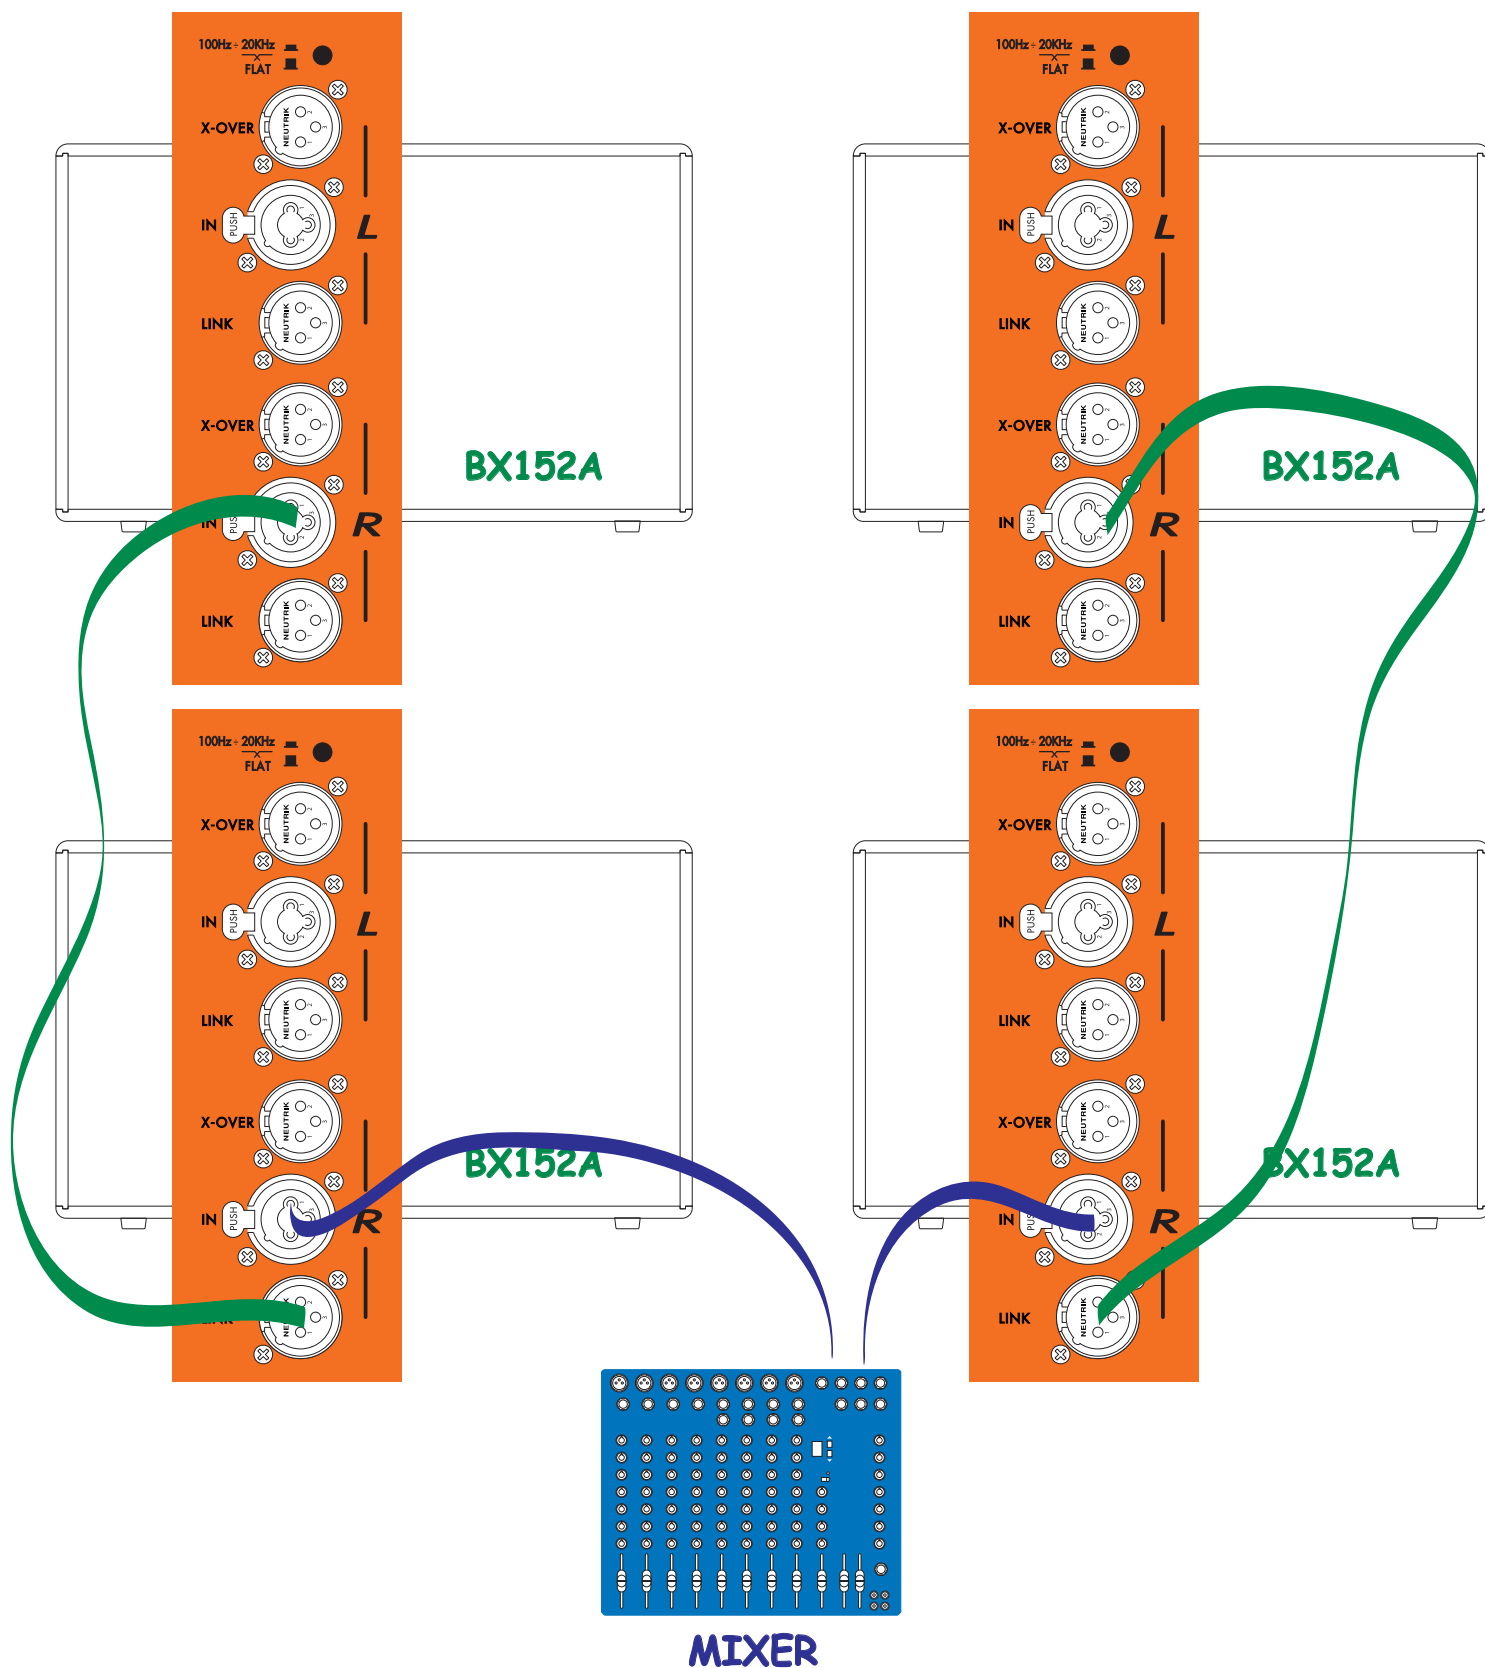

MIXER L/R OUTPUTS → BX152A 'R' INPUTS


BX152A 'R' Link OUTPUTS → 'R' INPUTS of other BX152A



One BX152A + two active loudspeakers

always use balanced shielded cables

BX152A: button pushed X-OVER mode

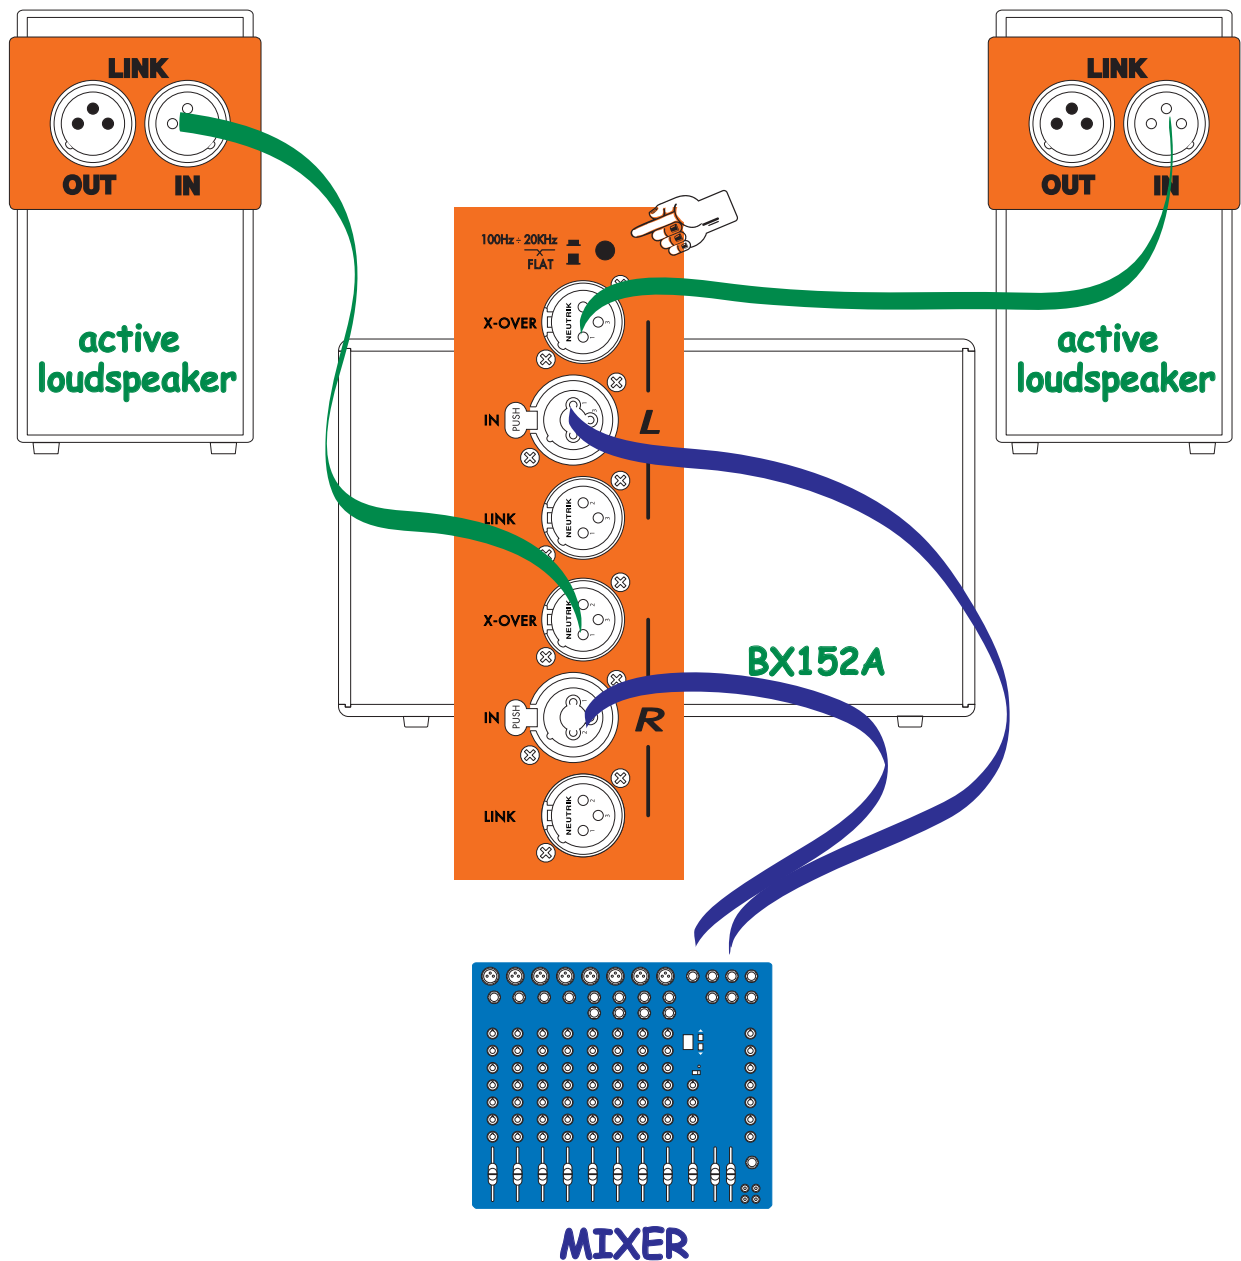

MIXER L/R OUTPUTS → BX152A L/R INPUTS

BX152A 'L' X-over OUTPUT → ACTIVE LOUDSPEAKER INPUT

BX152A 'R' X-over OUTPUT → ACTIVE LOUDSPEAKER INPUT




BX152A

connection examples

Two BX152A + two or more active loudspeakers

always use balanced shielded cables

BX152A: button pushed X-OVER mode

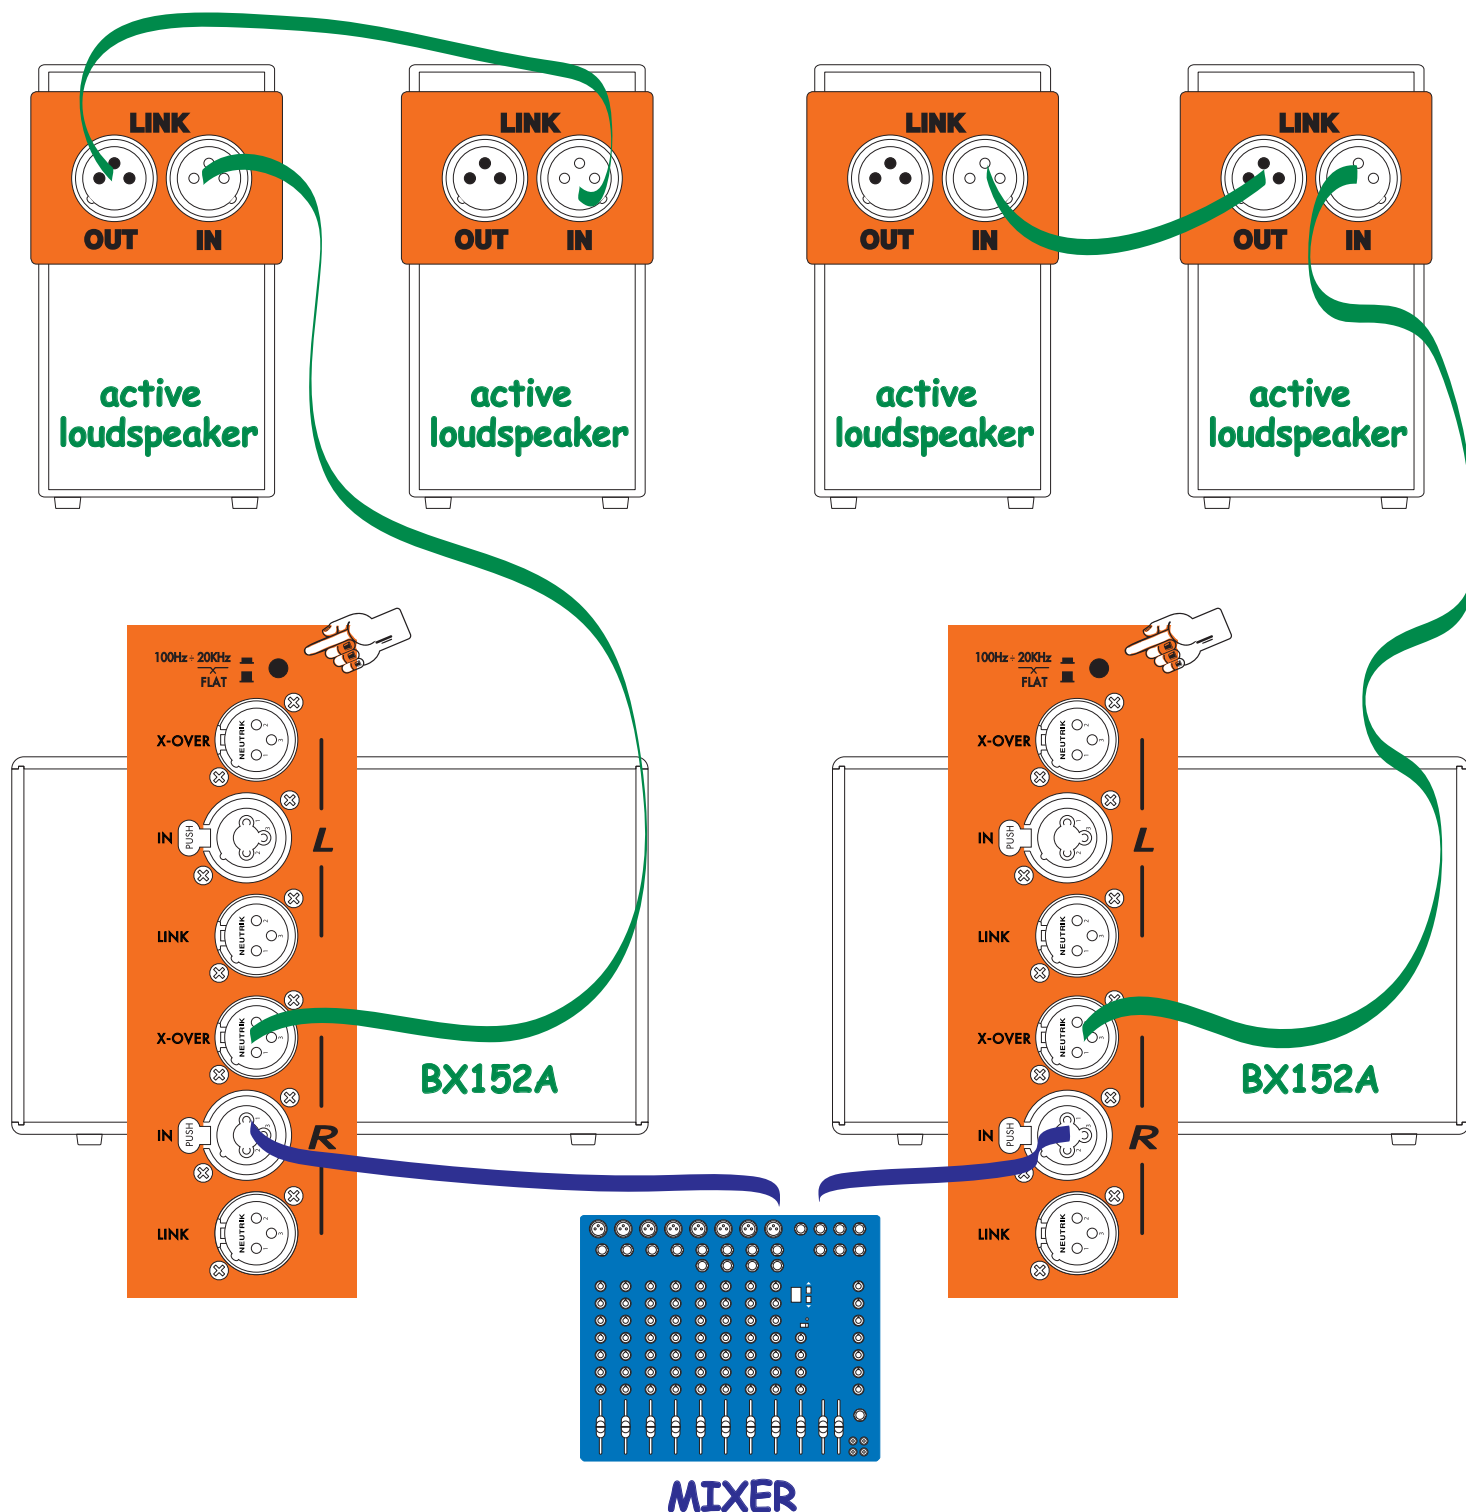

MIXER L/R OUTPUTS → BX152A 'R' INPUTS

BX152A 'R' X-over OUTPUTS → ACTIVE LOUDSPEAKER INPUTS