


MSW40T-A-AW | MONTARBO | Technical Specifications

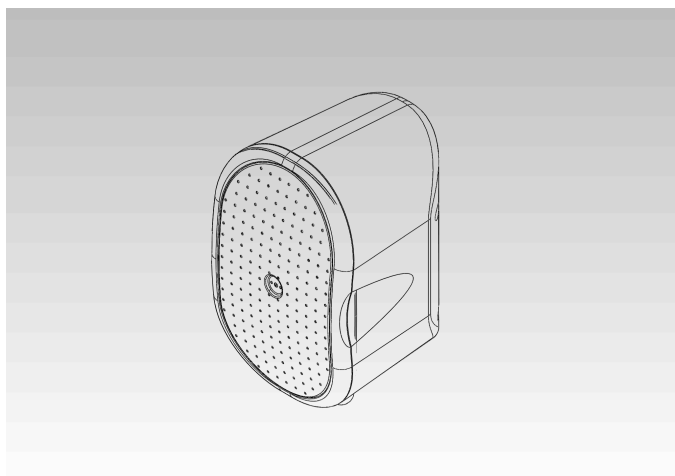

DESCRIPTION

The MSW40 series has been designed for indoor and outdoor installations in PA systems.

It offers quality performance in two alternative versions, the passive MSW40T model with transformer and the active MSW40A and MSW40AW.

An optional swivel mounting bracket is available for wall mounting.

This new series of compact speakers fully meets every need for audio installations in hotels, restaurants, supermarkets, malls, pubs. The MSW40T, with IP44 rating, can also be used in external environments and applications.

FEATURES

- 4" full-range speaker
- Passive version w/transformer – active version w/built-in amplifier
- Active version available in white or black
- Maximum 40W power selectable via switch
- Wall mounting with optional bracket
- 106 dB max SPL

ACCESSORIES

- Adjustable wall bracket

APPLICATIONS

- P.A. sound reinforcement
- Sonorizations in commercial areas

TECHNICAL SPECIFICATIONS

| | MWS40T | MWS40A/AW |
|---------------------|--|----------------------------------|
| Frequency Response: | 76:18,000 Hz | 76:18,000 Hz |
| Loudspeaker: | 4" Full range | 4" Full range |
| Sensitivity 1W/1mt: | 90 dB | 90 dB |
| Impedance: | 70V 122Ω/250Ω/500Ω/1000Ω 100V 250Ω/500Ω/1000Ω | 4Ω 4Ω |
| Power rating: | 70V 40W/20W/10W/5W 100V 40W/20W/10W | 30 W RMS 30W RMS |
| Controls: | Power selection Switch | Volume Control Power Switch |
| Power: | | 220V-240V 50Hz 110V-120V 60Hz |

PHYSICAL SPECIFICATIONS

| | MWS40T | MWS40A/AW |
|-------------------|-----------------|-----------------|
| Dimensions HxLxD: | 206x136x140 | 206x136x140 |
| Weight: | 2,3 Kg/5.07 Lbs | 2,4 Kg/5.29 Lbs |
| Colour: | Black | Black/White |
| IP rating: | IP44 | |