



D12A

SOUNDS COOL




The D Series, depending on the model, can be used for all types of applications including installations in churches, conference centers and discos. The woofer and neodymium driver combination provides excellent performance rivaling those cabinets costing much more.


Our professional Audio Products are designed and tested by an highly qualified engineering team with more than 30 years of experience. Great pride & care is placed in delivering products with excellent performance, specifications and dependable reliability. Also great emphasis is placed in creating and bringing to market products that can fill multiple applications and offer customers exceptional values.

MODEL ACTIVE	D 12A
SYSTEM TYPE	2-Way 12" Active Vented Speaker Cabinet
PROGRAM POWER LOW/HIGH	500W Bi-AMP (Low 400W-Class D; High 100W-Class AB)
PEAK POWER LOW/HIGH	1000W Bi-AMP (Low 800W-Class D; High 200W-Class AB)
TRANSDUCER LOW	12" Woofer- 2" voice coil; with Ventilation
TRANSDUCER HIGH	1 exit driver – 1 x 1.4" compression driver
Maximum SPL @1m	122dB Max (Calculated)
INPUT SENSITIVITY	0dBu
CROSSOVER FREQUENCY	1.8kHz
FREQUENCY RESPONSE	60Hz – 20kHz (-10dB)
PROTECTIONS	Overheat Protection/ Short Circuit Protection/ Compressor
USB PLAYER (OPZIONAL)	with USB and Micro SD CARD, Bluetooth
INPUT CONNECTORS	INPUT1-Mic with XLR and 6.3" jack / INPUT2-Line with XLR, 6.3" and 3.5" jack connectors
EXTERNAL CONNECTORS	Input 1&2 and Master Volume Control / 2-band EQ High-Low/ Power on with Green LED /Clip Limiter with Red LED / Ground Lift / DSP Presets
POWER SUPPLY	110-120V~50/60Hz or 220-240V~50/60Hz Switchable
ENCLOSURE	ABS cabinet with Rubber Feet. Metal Grille
DIMENSIONS (H x W x D)	618mm x 430mm x 350mm
NET WEIGHT	17.1Kg
VOLUME	0.13m ³



APPLICATIONS/CONNECTIONS

1 Active Subwoofer & 2 Active Satellites

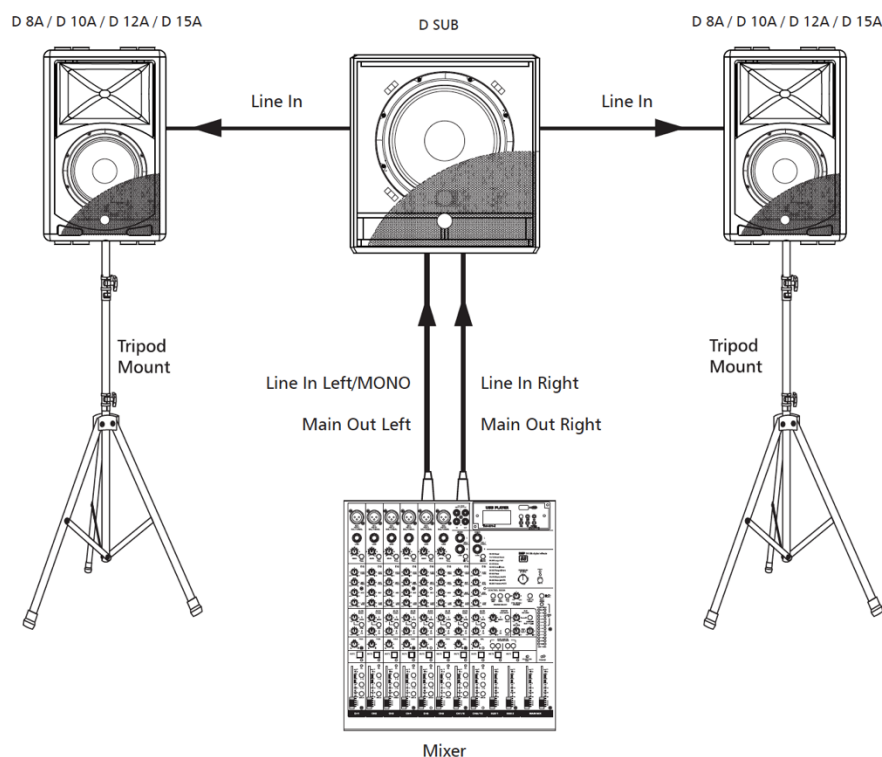

2 Active Subwoofers & 2 Active Satellites

